



PLX-Pure Lead High Rate PLX12-620 (12V620W)




Specifications

Rated Voltage	12V	
Nominal Rate ($W_{15}, 1.67V/cell$)	620W	
Nominal Capacity($C_{20}, 1.80V/cell$)	150Ah	
Dimension	Length	340.9±2mm (13.42 inches)
	Width	170±2mm (6.69 inches)
	Container Height	273.2±2mm (10.76 inches)
	Total Height	275.7±2mm (10.85 inches)
Approx. Weight	44.5 Kg (98.1 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	156.0 Ah	(20hr, 7.80A, 1.80V/cell)
	150.0 Ah	(10hr, 15.0A, 1.80V/cell)
	141.0 Ah	(5hr, 28.2A, 1.75V/cell)
	124.2Ah	(3hr, 41.4A, 1.75V/cell)
	107.0Ah	(1hr, 107.0A, 1.67V/cell)
Max. Discharge Current	1800A	
Internal Resistance (25°C)	Approx. 3.00mΩ(Fully charged)	
Operating Temp.Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-20 ~ 40°C (-4 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	45.0A	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	<p>PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.</p> <p>Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.</p>	



Layout

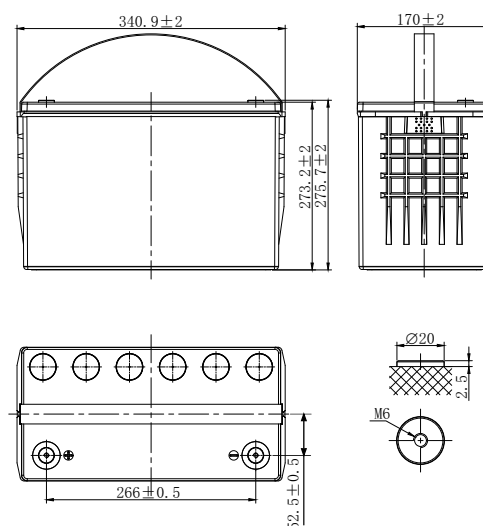

Constant Current Discharge (Amperes) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	364.0	288.6	249.7	218.6	160.4	117.3	94.2	54.1	38.7	31.0	26.4	17.7	14.7	7.65
1.80V/cell	419.2	330.4	278.3	238.8	171.4	123.3	98.0	56.6	40.4	32.3	27.6	18.2	15.0	7.80
1.75V/cell	458.2	361.7	301.5	254.9	182.4	126.8	100.8	58.2	41.4	33.2	28.2	18.4	15.2	7.89
1.70V/cell	493.6	391.2	320.8	268.1	189.4	131.4	104.7	59.0	42.2	33.7	28.6	18.7	15.4	7.96
1.67V/cell	551.0	412.0	338.3	278.5	197.0	136.5	107.0	60.1	42.7	34.2	28.9	18.9	15.5	8.02
1.60V/cell	595.5	419.0	349.8	286.2	200.9	138.6	108.8	61.0	43.2	34.6	29.2	19.1	15.6	8.08

Constant Power Discharge (Watts/cell) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	698.9	564.3	491.2	432.2	318.7	234.3	188.6	108.7	78.1	63.0	53.7	36.1	30.2	15.8
1.80V/cell	793.6	639.8	542.0	467.8	337.8	244.4	195.0	112.9	81.0	65.1	55.9	37.2	30.7	16.1
1.75V/cell	857.2	693.9	582.1	494.7	356.2	249.0	199.0	115.4	82.6	66.5	56.8	37.3	31.0	16.2
1.70V/cell	908.7	741.9	611.9	514.8	366.0	255.6	205.0	116.3	83.7	67.2	57.3	37.7	31.2	16.2
1.67V/cell	956.6	775.7	620.0	531.5	378.8	263.9	208.4	117.7	84.1	67.8	57.5	38.0	31.3	16.3
1.60V/cell	978.0	781.2	656.3	541.1	382.3	265.7	209.9	118.4	84.4	67.8	57.5	38.0	31.3	16.3



PLX-Pure Lead High Rate PLX12-620 (12V620W)

Applications

- UPS
- Emergency lighting
- Emergency power supply
- Electrical starting
- Power tools


General Features

- 15 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


Standards

- Classified as "Very Long Life" according to Eurobat
- CE Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

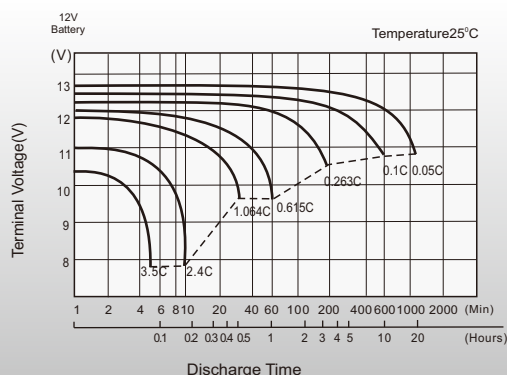


Float Charging Characteristics

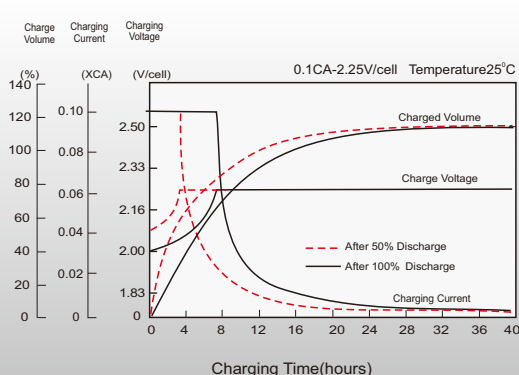

Effects of Temperature on Discharging Time

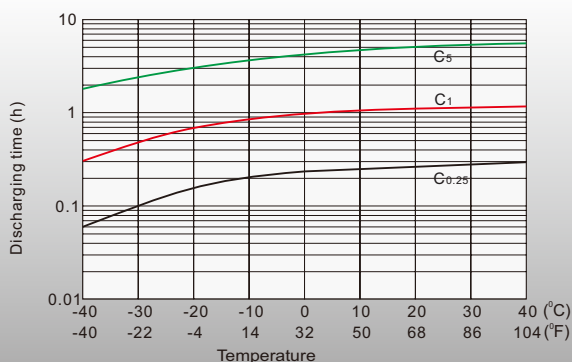

Self-discharge Characteristics

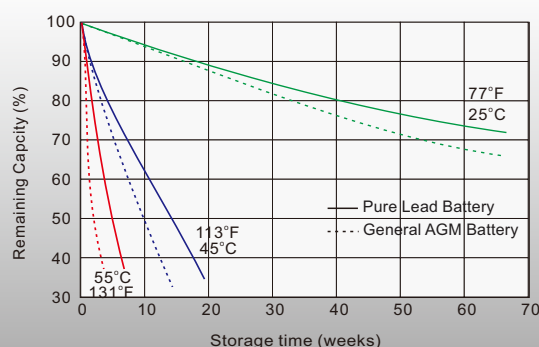

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)
[Http://www.leoch.us](http://www.leoch.us)

© 2019 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-PLX12-620-PD-EN-V1.0-201906